

LED Panel – 600 Square


IP 40



LED Panel – 600 Square is a high performance direct backlit luminaire suitable for installation in standard T bar ceiling systems. It is designed to be used in office buildings, commercial spaces, schools, public buildings, hospitals and for applications with higher demands for maintenance. The fixture is made from steel frame painted in RAL 9003 color covered by opaline acrylic sheet. The panel is based on LED modules with superb performance characteristics, long life span and economic operation.

Specifications

Power Consumption	34 W
Input Voltage	48 V, DC
Input Current	700 mA
Control	Redwood Enabled 1Ch 3G
Dimensions	597 x 597 x 62, 620 x 620 x 62
Mounting	Grid Drop Ceiling – 600 x 600, 625 x 625
Ingress Protection Rating	IP 40
Weight	4,5 kg
Operating Temperature	-30°C...+40°C
Lumen Output	4960 lm
Color Temperature	3000 K, 4000 K, 5000 K
Lifespan	50 000 h, L 70
Beam Angle	120°
LED Chips Efficiency	145 lm/W
CRI	> 80
LED Modules Wiring	Serial

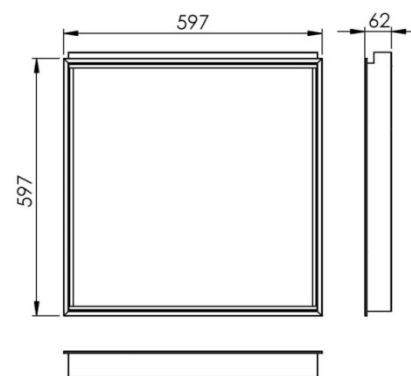

Compliance

EN 55011
EN61000 - 3 - 2
EN61000 -3-3
EN 61547 EN60598-1 EN60598-2-1
CE, RoHS

SELV - Safety Extra Low Voltage

Ordering info

SET-RWR-600-1	Flushed fixed LED luminaire 600x600 - into grid drop ceiling
SET-RWR-600-2	Flushed fixed LED luminaire 600x600 - into drywall
SET-RWR-600-3	Flushed fixed LED luminaire 600x600 - into metallic grid drop ceiling
SET-RWR-625-1	Flushed fixed LED luminaire 625x625 - into grid drop ceiling
SET-RWR-625-2	Flushed fixed LED luminaire 625x625 - into drywall
SET-RWR-625-3	Flushed fixed LED luminaire 625x625 - into metallic grid drop ceiling

